


PROFESSIONAL INTERCOM MICROPHONE

H-W02

Window intercom to ease communication through counter windows, glass partitions or windows in box offices, banks, offices, control points, private accesses, car parks, etc.

Clear sound for voice. Easy to use.

Function Diagram

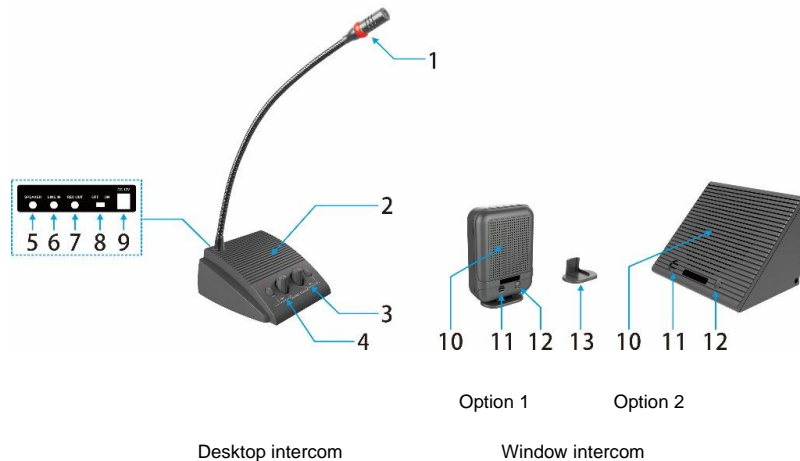

1. Electret condenser cardioid microphone; Indicator light on active microphone: when microphone is active, indicator light switches on
2. Monitor speaker of desktop intercom, to monitoring the sound from windows microphone.
3. Volume knob and on/off switch of monitor speaker for desktop intercom (with indicator).
4. Volume knob and on/off switch of monitor speaker for windows intercom (with indicator).
5. SPEAKER: Connection for window intercom, 3.5 mm stereo jack
6. LINE IN: 3.5 mm jack for reproduction through window intercom
7. REC OUT: 1 REC, 3.5 mm stereo jack
8. Power on/off switch
9. POWER INPUT DC12V
10. Monitor speaker of window intercom, to monitoring the sound from desktop microphone.
11. Microphone of window intercom
12. Call: Press this key to give call indicator to desktop intercom.
13. Bracket for window intercom (Option 1)

TECHNICAL DATA SHEET	
CHARACTERISTICS	<p>Window intercom microphone</p> <p>Quality sound with anti-feedback processor.</p> <p>Duplex two-way sound with communication control.</p> <p>Independent volume knob for window and interior intercom</p> <p>Easy to use.</p>
CONTROLS	<p>On/off</p> <p>Independent window and interior volume</p>
FUNCTIONS	<p>Automatic communication control, internal intercom priority</p> <p>Anti-feedback processor</p> <p>LED power indicators on desktop intercom</p> <p>Power 2 x 5 W</p> <p>Optimum distance for speaking into window intercom microphone 20 cm</p> <p>The window intercom can be hung or stuck on the glass with the provided. double-sided adhesive pads.</p>
INPUTS	<p>1 microphone-loudspeaker connection for window intercom, 3.5 mm stereo jack</p> <p>1 line, 3.5 mm jack for reproduction through window intercom</p>
OUTPUT	1 REC, 3.5 mm stereo jack
POWER SUPPLY	12 V DC, 1 A with adapter included
CABLE	2.4 m cable for window intercom
DIMENSIONS	<p>Desktop intercom: 141 x 62 x 142 mm depth</p> <p>Gooseneck microphone: 420mm height</p> <p>Window intercom:</p> <p>Option 1: 84 x 124 x 37 mm depth (with bracket)</p> <p>Option 2: 145 x 100 x 100 mm depth</p>
WEIGHT	1.2 kg
ACCESSORIES	<p>Foam windshield</p> <p>Adhesive pad for window intercom installation</p>